

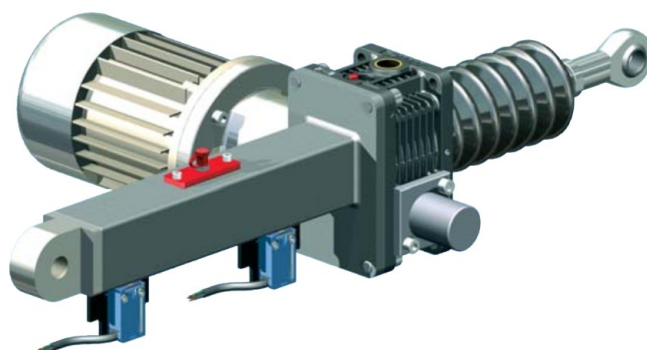


双U型螺旋升降机选型手册

旋转支撑管

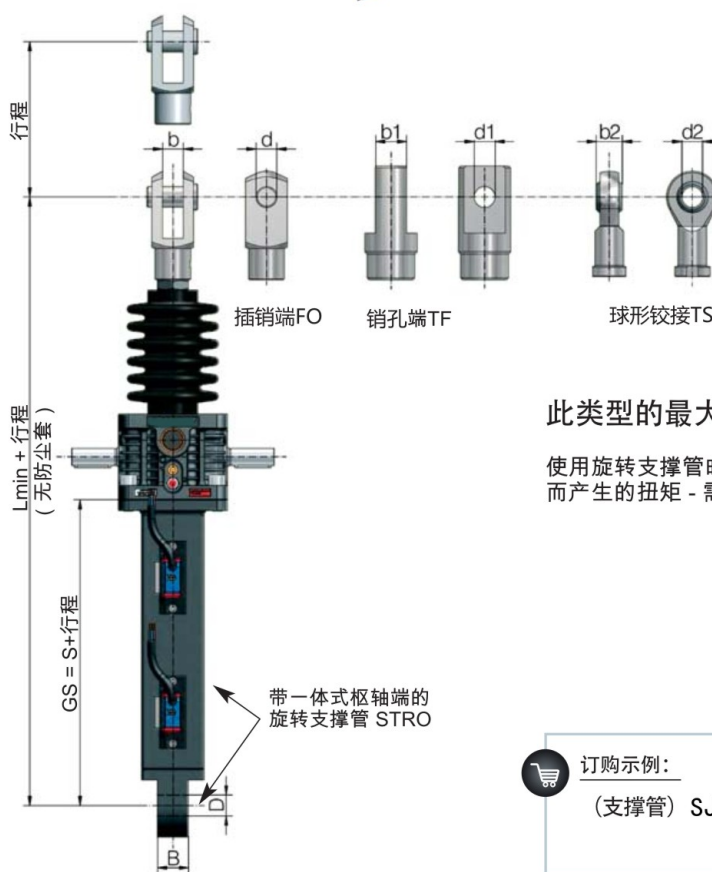

旋转轴



此类型的最大行程：500 mm!

使用旋转支撑管时，请考虑由于电机重量而产生的扭矩 - 需要提供支撑!



订购示例：

(支撑管) SJA5 -STRO-P, GS=150mm

规格	选项	S	L min. FO	L min. TF	L min. TS	d	b	d1	b1	d2	b2	D	B
SJA5	标准	82	224	224	226	12	12	12	15	12	16	12	20
	带防旋块	97	239	239	241	12	12	12	15	12	16	12	20
	带限位开关组	155	297	297	299	12	12	12	15	12	16	12	20
SJA10	标准	94	262	262	267	14	14	14	24	14	19	20	30
	带防旋块	114	282	282	287	14	14	14	24	14	19	20	30
	带限位开关组	166	334	334	339	14	14	14	24	14	19	20	30
SJA20	标准	98	303	303	300	20	20	20	30	20	25	20	30
	带防旋块	118	323	323	320	20	20	20	30	20	25	20	30
	带限位开关组	170	375	375	372	20	20	20	30	20	25	20	30
SJA50	标准	137	426	398	416	30	30	30	35	30	37	40	50
	带防旋块	167	456	428	446	30	30	30	35	30	37	40	50
	带限位开关组	219	508	480	498	30	30	30	35	30	37	40	50
SJA80	标准	137	454	418	452	35	36	35	40	35	25	40	50
	带防旋块	167	484	448	482	35	36	35	40	35	25	40	50
	带限位开关组	219	536	500	534	35	36	35	40	35	25	40	50